



**GUDY®
PRODUCT GUIDE**




Your professional mounting solution –


used by international galleries, sign makers, industrial manufacturers and many more...

For decades, Neschen's gudy® mounting films have been a high-quality solution for a variety of customer demands. From high-end mounting of photos and prints, to point of sale advertising or industrial applications – gudy® mounting films create outstanding results.

The gudy® portfolio is made for cold lamination, guaranteeing best results after laminating with a laminating machine or by hand.

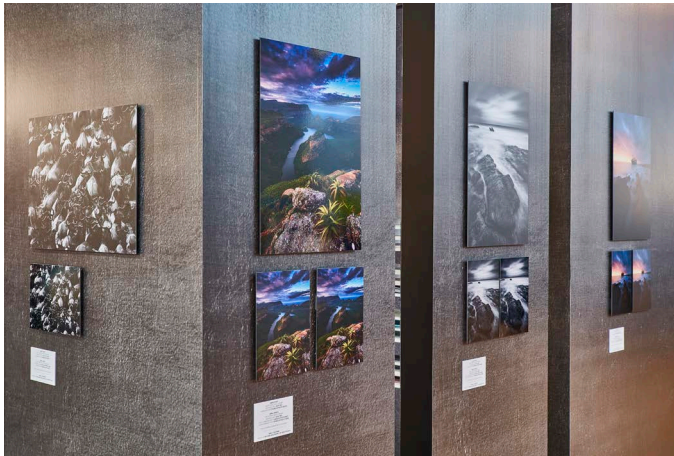

A professional mounting and framing solution for photographs, fine art prints, Baryta papers, photo albums or passe-partouts. From face mountings of inkjet papers behind acrylic glass or the high-end adhesion of fine art papers to board materials, the gudy® range is the best choice for our customers' demands.

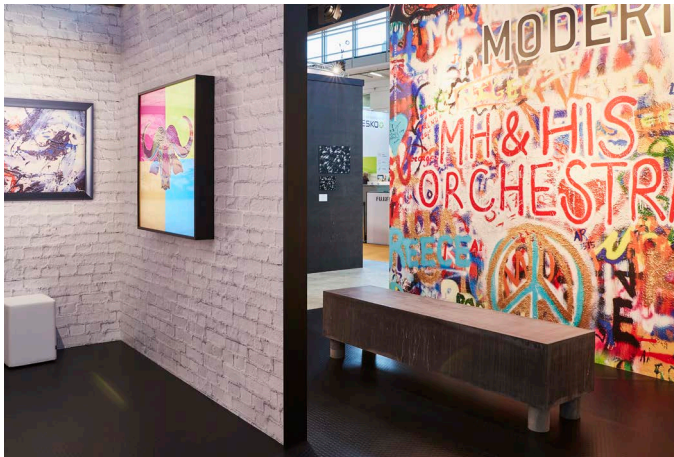

Discover permanent or non-permanent adhesives for a variety of short-term or long-term applications, such as **installing promotional posters on shop windows, advertising on exhibition booths or creating selfadhesive boards**. Gudy® sets no boundaries to your creativity.



Dimensionally stable, flexible and ageing-resistant – the gudy® portfolio is a reliable, high-quality choice for many applications. The waterbased adhesive formulations, with low or high adhesive strength, is environmentally friendly and **ideal for industrial applications** like die manufacturing, the automotive industry and many much more...

GUDY® PRODUCT GUIDE

	802	802 twin	8020	8020 twin
Max. width	160 cm	160 cm	200 cm	200 cm
Carrier type	PET	PET	PET	PET
Thickness	23 µm	23 µm	12 µm	12 µm
Release liner	single-sided	double-sided	single-sided	double-sided
Primary Bond	permanent	permanent	permanent	permanent
Secondary Bond	permanent	permanent	permanent	permanent
Adhesion power	medium	medium	medium	medium
Recommended Laminator speed	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	1-1,5 mpm
Indoor suitability	✓	✓	✓	✓
Outdoor suitability	✓	✓	✓	✓
Certificates	Photographic Activity Test (PAT) ISO 18916			

Recommended board applications

On acrylic plates	✓	✓	✓	✓
Behind acrylic plates (tempered)				
Glass	✓	✓	✓	✓
PVC hardfoam boards (e.g. Forex)	✓	✓	✓	✓
HPL boards	✓	✓	✓	✓
Polystrol boards (e.g. Smart-X)	✓	✓	✓	✓
Kapa boards	✓	✓	✓	✓
Dibond boards	✓	✓	✓	✓
Dark foamboards				
Stadur boards (PVC-free)	✓	✓	✓	✓
MDF boards				
OSB boards				
Veneer plates				
Screen printing plates	✓	✓	✓	✓
Plywood boards				
Honeycomb paperboard	✓	✓	✓	✓

Suitable print media

PE or Barytt photo papers	✓	✓	✓	✓
Digital prints	✓	✓	✓	✓
100% rag und Alpha cellulose Paper				
Fine Art Papers Smooth up to 300 g/m ²				
Fine Art Papers textured up to 350 g/m ²				
Fine Art Papers >350 g/m ²				
Low-cost graphic papers up to 170 g/m ²				
Textiles				
Banner materials				

Suitable Neschen laminating machines

Neschen Photolam 650	✓	✓		
Neschen Ecolam 1650	✓	✓		
Neschen Coldlam 1650	✓	✓		
Neschen Hotlam 1650 TH	✓	✓		
Neschen Hotlam 1650 Double H	✓	✓		

permanent adhesive

803 power tack	808 PP opaque	PP clear	ultra clear	831 Fine Art smooth	832 Fine Art textured
160 cm	160 cm	160 cm	152,4 cm	160 cm	160 cm
PET	white PET	OPP	PET	Paper	Paper
23 µm	75 µm	25 µm	12 µm	44 µm	44 µm
single-sided	single-sided	single-sided	double-sided	single-sided	single-sided
permanent	permanent	permanent	permanent	permanent	permanent
permanent	permanent	permanent	permanent	permanent	permanent
very high	medium	medium	medium	high	high
1-1,5 mpm	1-1,5 mpm	1-1,5 mpm	0,5 mpm	0,5-1 mpm	0,5-1 mpm
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓		
		Photographic Activity Test (PAT) ISO 18916		Photographic Activity Test (PAT) ISO 18916	Photographic Activity Test (PAT) ISO 18916

	✓	✓	✓		
			✓		
	✓	✓	✓		
✓	✓			✓	✓
✓	✓				
✓	✓	✓		✓	✓
✓	✓	✓		✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓		✓	✓
✓	✓	✓		✓	✓
✓					✓
✓					
✓					✓
✓	✓				
✓					✓
✓				✓	✓

	✓	✓	✓		
✓	✓	✓			
				✓	✓
				✓	
					✓
					✓
✓					
✓					

				✓	✓
✓	✓	✓		✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓

870	806 Hybrid
124 cm	130 cm
Carrier less	PVC
Carrier less	70 µm
single-sided	single-sided
permanent	permanent
permanent	semi-permanent
medium	P - high / R- low
0,5 mpm	1-1,5 mpm
✓	✓
✓	
Photographic Activity Test (PAT) ISO 18916	

non-permanent adhesive		
Window	804	Dot
130 cm	130 cm	160 cm
PET	PVC	Carrier less
23 µm	70 µm	Carrier less
double-sided	double-sided	single-sided
permanent	permanent	semi-permanent
removable	removable	semi-permanent
P - hoch / R - low	P - hoch / R - low	low
0,5 - 1 mpm	0,5 - 1 mpm	0,5 mpm
✓	✓	✓
		Photographic Activity Test (PAT) ISO 18916

✓	✓
✓	✓
	✓
✓	✓
✓	✓
✓	✓
✓	
✓	
✓	✓

		✓
✓	✓	
✓	✓	✓
		✓

✓	
	✓
✓	
✓	
	✓
	✓
	✓

✓	✓	
		✓

✓	✓
✓	✓
✓	✓
✓	✓

✓	✓	✓
✓	✓	✓
✓	✓	✓
✓	✓	✓

NESCHEN COATING GMBH

Hans-Neschen-Str. 1
31675 Bückebug, Germany

T +49 (0)5722 207 0

F +49 (0)5722 207 197

E info@neschen.de

www.neschen.com



WWW.NESCHEN.COM