

ReTac®

Smooth 75

EASY APPLICATION AND REMOVAL

A 75 micron, printable white polymeric PVC film coated on one side with ReTac® ultra removable adhesive. With ReTac® adhesive technology, there is no need to worry about surface damage during graphic removal. ReTac® Smooth 75 can be removed and repositioned multiple times without a decrease in bond strength. It has a Class 0 fire rating, making it ideal for use on most indoor surfaces and for applications in public areas that require compliance with strict fire regulations, such as airports, hotels and hospitals.

Recommended for curved, textured or angled surfaces where conformability is a priority.

- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS

Product Code: RTC & RTM

75 White
micron Phthalate-Free
Polymeric
PVC  Gloss or
Matte



(Eco)Solvent
Latex
UV




ReTac® ultra removable
and re-positionable
adhesive



Widths up to 1370mm



5 YEARS DURABILITY
INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY EXTERIOR)

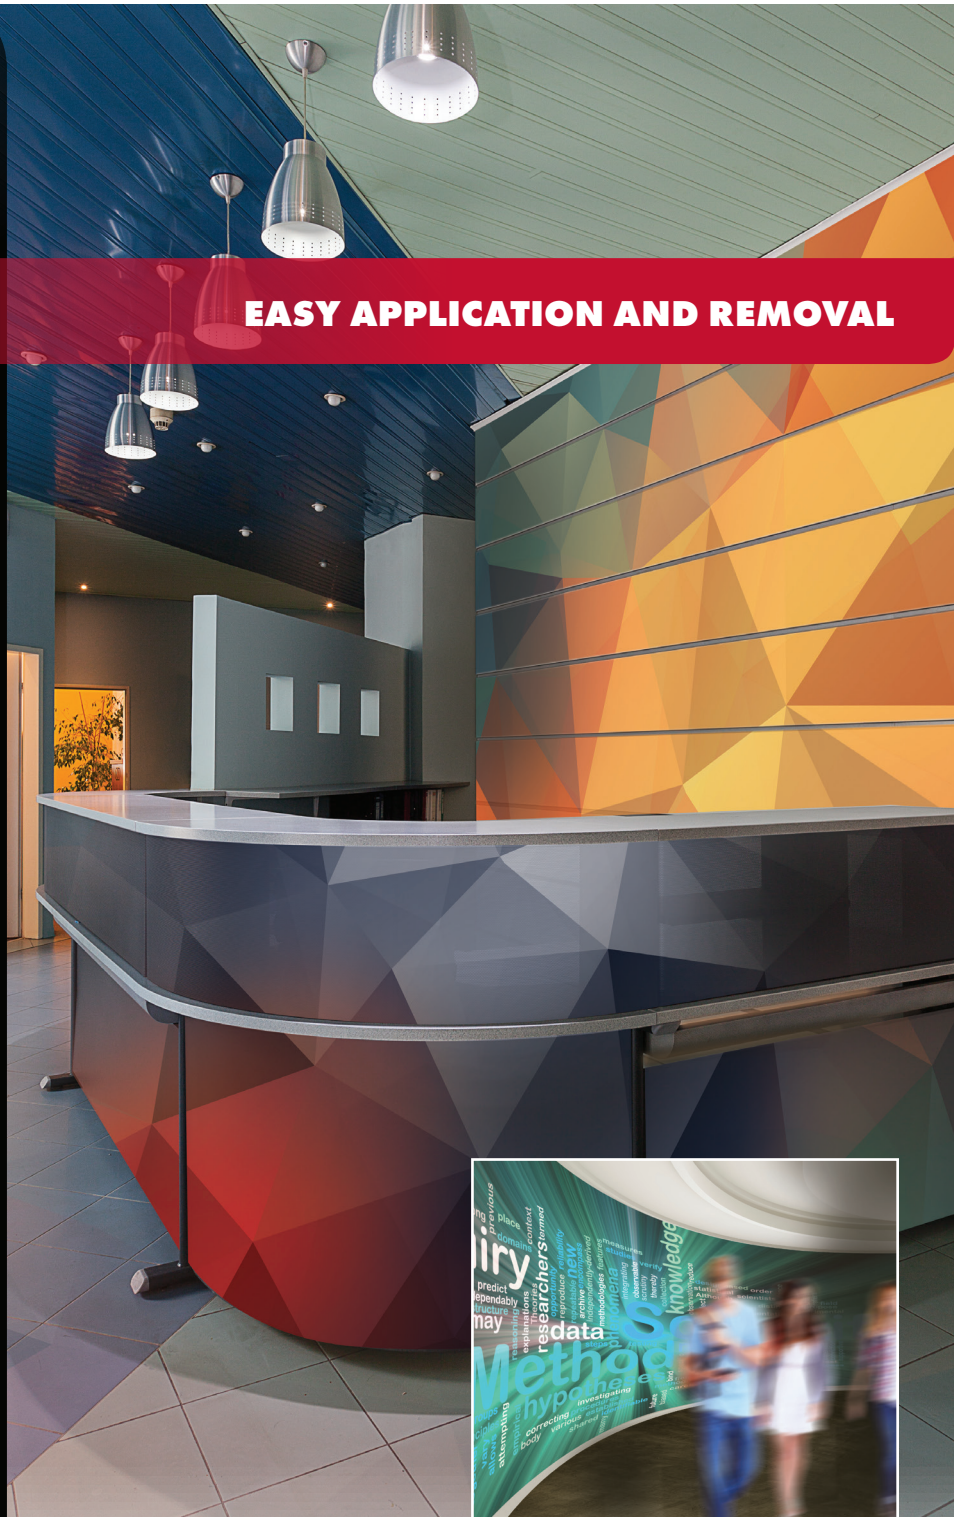

APPLICATIONS

- Curved Surfaces
- Exhibition Graphics
- Interior Décor
- Removable Decals



Certified for
HP Latex Inks

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

ReTac®

Smooth 75

ReTac® Smooth 75 is a 75µ (3 mil) printable gloss and matte white, phthalate-free polymeric PVC film, coated on one side with ReTac® ultra removable adhesive. The adhesive is protected by a single-sided, siliconised clay coated Kraft release liner. This high quality, ink receptive printable vinyl was specifically developed for easy application and removal of vibrant graphics to a wide range of substrates. ReTac® Smooth 75 can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- RETAC® IS A PHTHALATE-FREE FILM.
- IDEAL FOR REMOVABLE WALL DECALS, APPLIQUES AND WALL MURALS.
- SUITABLE FOR USE ON MOST INDOOR SURFACES, PAINTED WALLS, MELAMINE, GLASS, AND LOW SURFACE ENERGY SUBSTRATES.
- RETAC® SMOOTH 75 HAS A CLASS 0 FIRE RATING ACCORDING TO UK STANDARDS FOR SURFACE SPREAD OF FLAME, MAKING IT PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal

For more information, performance and warranty guide lines please contact your local Drytac office.

© 2018 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte & Gloss White Polymeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	135 gsm 1 side siliconised clay coated Kraft paper

PRODUCT CHARACTERISTIC

Film Thickness	3 mil (75µ)	3.7 mil (93µ)
Adhesive Layer	0.7 mil (18µ)	
Film/Adhesive Ratio	3:0.7	
UV Protection Factor	Not Applicable	
Outdoor Durability	5 year; 2 years removability	
Application Temperature	>41°F (5°C)	
Service Temperature Range	-4°F to 149°F (-20°C to 65°C)	
Flame Retardancy	Class 0 BS 476 Part 6 & 7 Fire Rating	
Shelf Life	2 years	
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity	

OVERLAMINATE RECOMMENDATIONS

When using ReTac® Smooth 75, an overlaminate can be used for maximum life expectancy. Products recommended for use with ReTac® Smooth 75 are Drytac's Weathershield® overlaminates.

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

DRYTAC®

ADHESIVE SCIENCE

www.drytac.com